
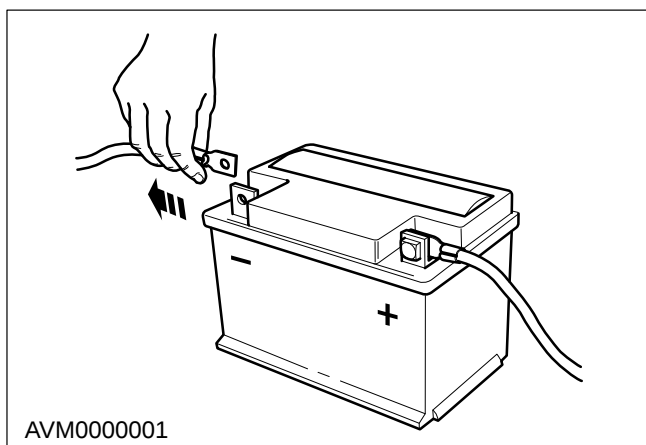


Switch – Low Washer Fluid – Remove and Install (33 607 0)**Remove**

- 1. Disconnect the battery negative lead.**

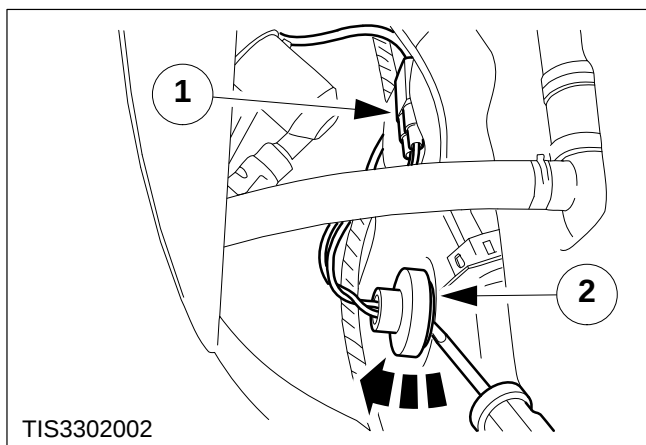

- 2. Remove the low washer fluid switch.**

- 1 Disconnect the multiplug.
 - Drain or syphon contents from the reservoir.
- 2 Lever the switch out of the sealing grommet.

Install

- 3. Refit the components in reverse order.**

Refill the reservoir.