

Reflector Assembly – Headlamp – Remove and Install (32 123 0)


Remove

1. Remove the headlamp as described in Operation No. 32 115 0.

Detach the headlamp lens

2. Remove the protective cover and the headlamp lens.

Press up the retaining clips.

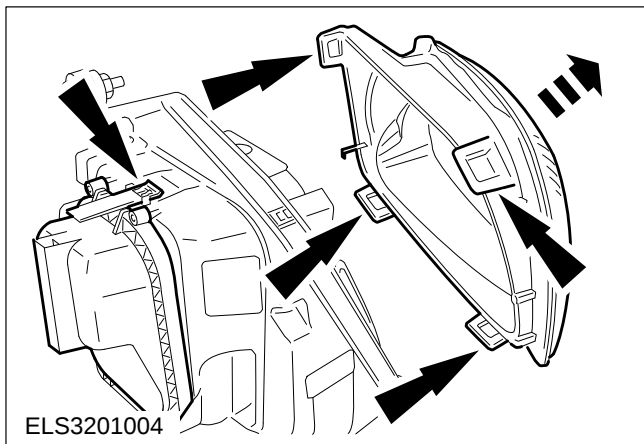


3. Disconnect the multiplugs and remove the bulb.


1 Multiplug of auxiliary lamp.


2 Side lamp bulb.

3 Headlamp multiplug.

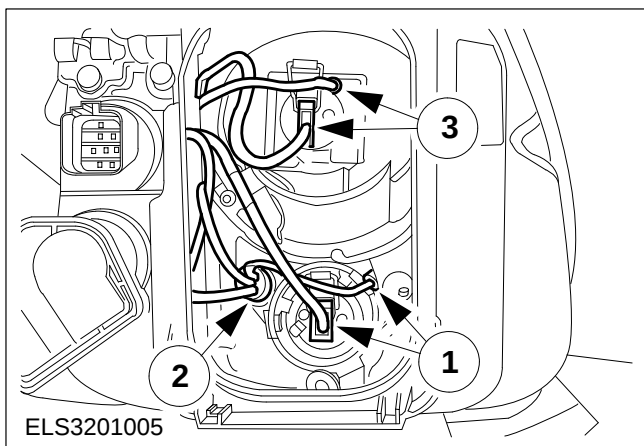

4. Pull the reflector unit out of the pivots.

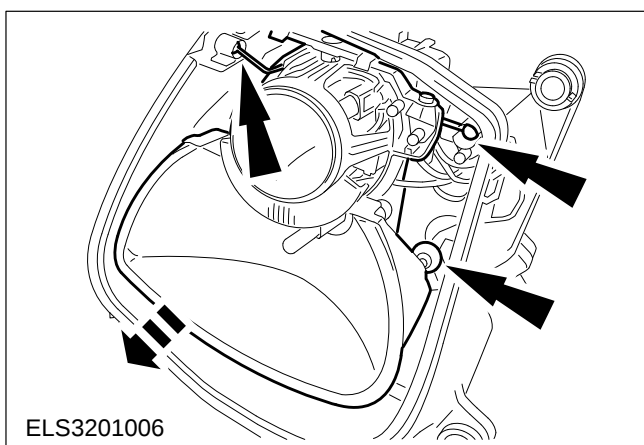

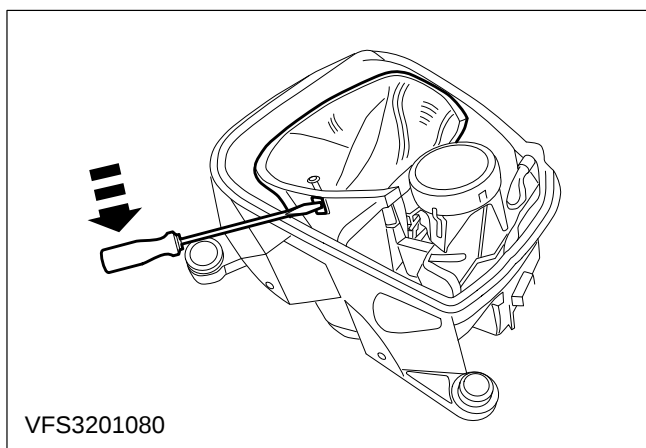

- 5. Pull the reflector unit out of the pivots (continued).**

Install

- 6. Refit the components in the reverse order.**
- 7. Check the headlamp alignment, if necessary align the headlamps as described in Operation No. 32 113 0.**