


Panel – Cowl Side Trim (Front) – Remove and Install (43 735 0)

Remove

1. Remove the rear cowl side trim panel (refer to Operation Number 43 735 0).
2. Remove the front cowl side trim.
Locally detach the door weatherstrip.

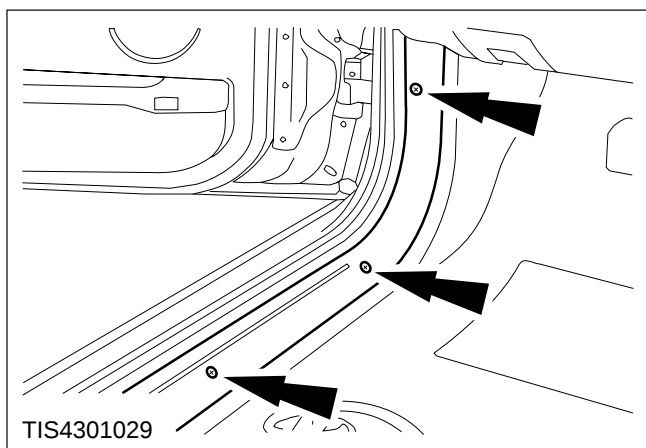

Install

3. Refit the components in reverse order.