

Power Amplifier – Radio/Cassette – Remove and Install (38 456 0)

Remove

NOTE: The power amplifier is located behind the glove compartment.


CAUTION: Disconnect the battery negative lead.

1. **Remove the crash padding/facia (refer to Operation Number 43 644 0).**

CAUTION: When disconnecting the multiplugs do not pull on the wiring; pull on the multiplug body.

2. **Remove the power amplifier.**

- 1 Disconnect the two multiplugs.
- 2 Remove the three captive screws.

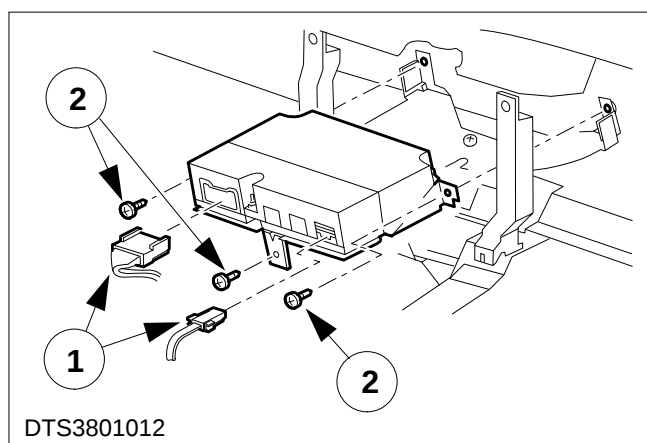

Install

3. **Refit the components in reverse order.**