



Autochanger – CD Player – Remove and Install (Notchback) (38 446 0)

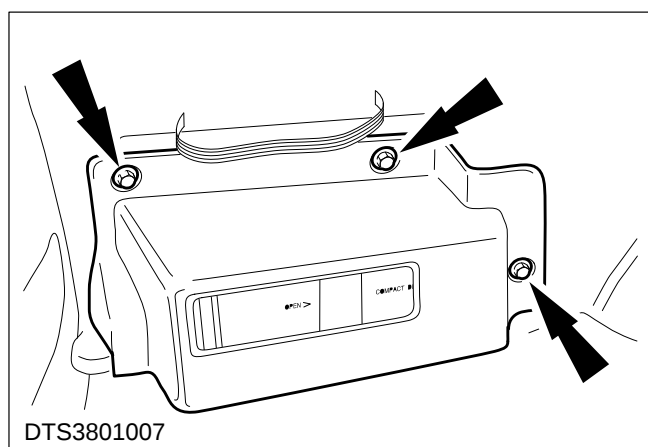


Remove

1. Remove the cover (three screws).
2. Fold back the luggage compartment carpet and insulation material.

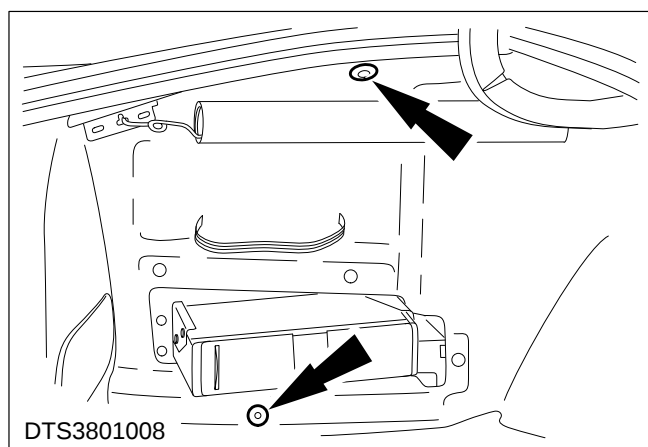


3. Remove two plastic fasteners and fold back the side trim panel/insulation.

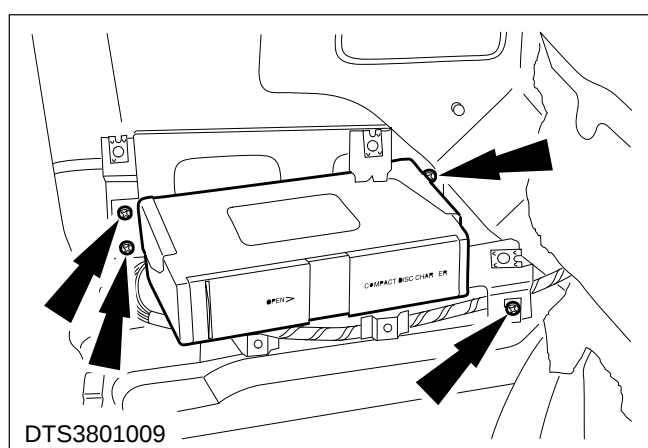


CAUTION: When disconnecting the multiplug do not pull on the wiring; pull on the multiplug body.

4. Detach the unit (four screws).

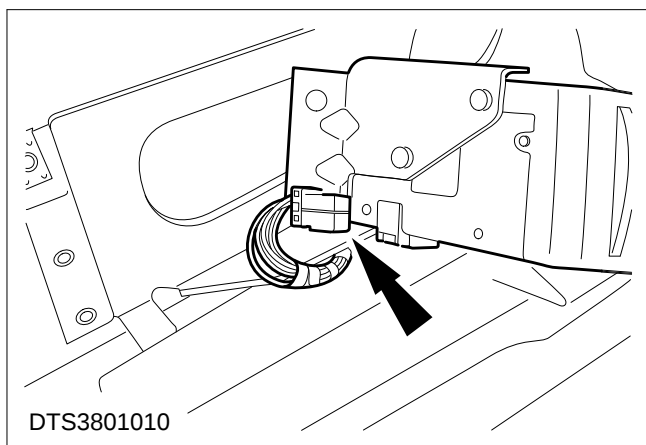

⚠ CAUTION: When disconnecting the multiplug do not pull on the wiring; pull on the multiplug body.

5. Disconnect the multiplug and remove the unit.

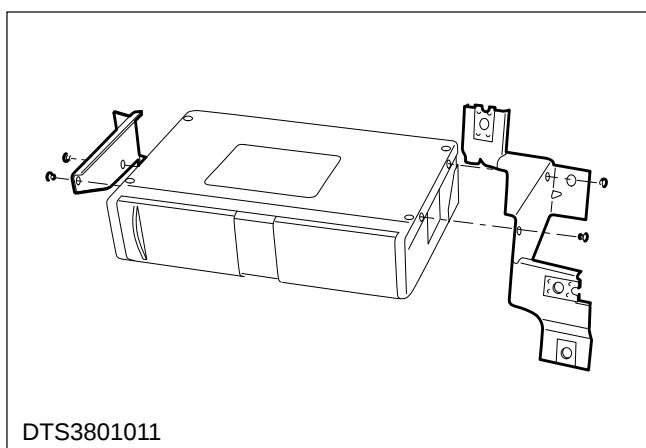

6. Remove the two brackets.

Two screws for each bracket.

Install

7. Refit the components in reverse order.