


Module – Remote Control – In-Car Entertainment – Remove and Install (38 481 0)

Remove

⚠ CAUTION: Disconnect the battery negative lead.

⚠ CAUTION: When disconnecting the multiplugs contained in this operation, do not pull on the wiring; pull on the multiplug body.


- 1. Detach the driver's side lower crash pad panel (five screws).**

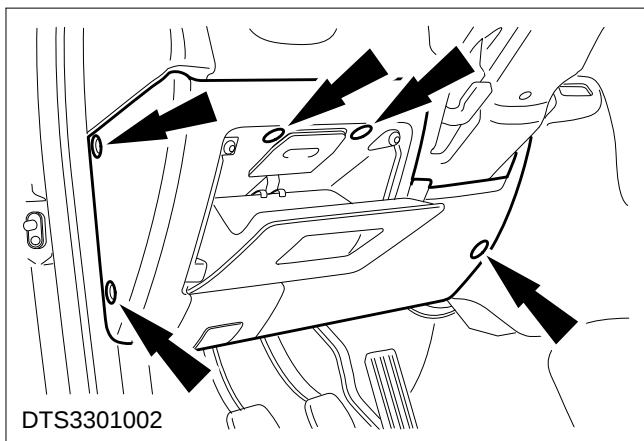

NOTE: There is no need to disconnect the hood release cable.


- 2. Detach the driver's side lower crash pad/facia panel (continued).**


- Disconnect the trip computer switch multiplug (when fitted).
- Detach the data link connector and lower the panel.

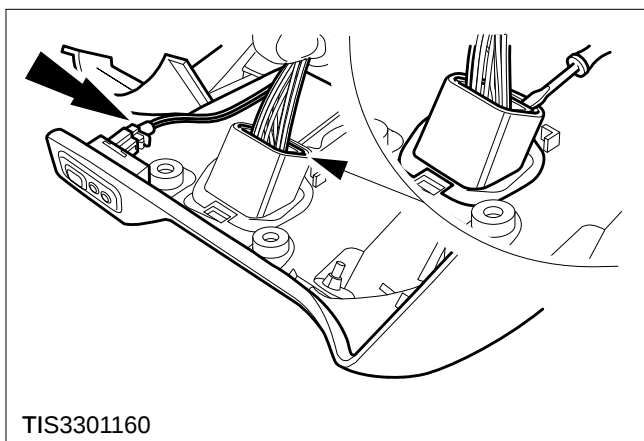

- 3. Detach the module.**

Slide the module to the left to detach.

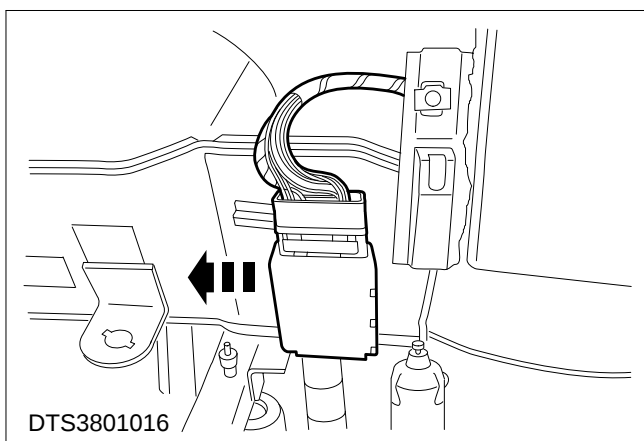

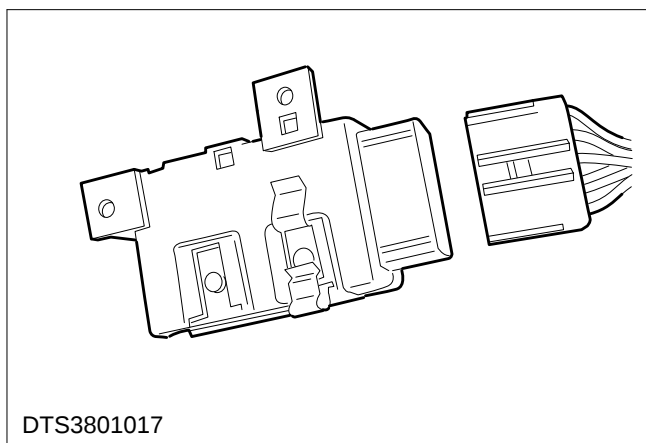

- 4. Disconnect the multiplug and remove the module.**

Install

- 5. Refit the components in reverse order.**